
Conjunctive Use and Management of Surface and Groundwater Resources as Part of Integrated River Basin Management

Sudhakar Pathak, Abhishek Saxena

Faculty of Civil Engineering, Shri Ramswaroop Memorial University, Barabanki, UP

ABSTRACT

Conjunctive use of surface water and ground water is a complex water management strategy that involves management of surface water and groundwater as one resource under diverse geological, hydro- geological, hydrology and geophysical setting. The work presents GIS based integrated modelling, which integrates soil moisture accounting and irrigation water requirement, rainfall–runoff, system loss and groundwater flow system. Developed model is employed to evaluate different water management scenarios such as change in rainfall sequence (wet, normal and dry season), change in canal water supply, impact of land use changes including their socio–economic implications. The application of model is illustrated with real application in a part of Indo-Gangetic plain of Uttar Pradesh in India. In this paper different modes of irrigation are assessed and compares them with conjunctive use of surface and groundwater. The data used in this study was collected from different department e.g. Irrigation Department, Sawara U.P. Lucknow and Ground water Department Lucknow. The results highlighted the problem of increased use of tube well water in the saline groundwater zones that had resulted in the deterioration of the soils and groundwater quality, which has led to the problem of up coning of saline groundwater. Conjunctive water management in crop increased the farm income, compared to only using the canal and tube well water, respectively. The model optimization results showed that it is possible to increase the total gross margins while keeping the salinity levels and the changes in depth to water table in the acceptable limits through conjunctive water management.

INTRODUCTION

The increasing acuteness of water scarcity problems, worldwide, requires the adoption of a double approach of water supply management and water demand management. The river basins is considered as water resources management units and as a spatial basis for the formulation of water management strategies integrating all cross-sectional issues such as water resources conservation, environment, water resources allocation, water demand management, etc. The conjunctive use of surface and groundwater is one of the strategies of water supply management which has considered to optimize the water resources development, management and conservation within a basin, and artificial recharge of aquifers is certainly one of the tools to be used for that purpose. The use of the river basin as the spatial unit for analyzing the interactions and interrelations between the various components of the system, and for defining the water management policy, is well justified, and is

increasingly becoming common practice. The adoption of an integrated river basin management approach for elaborating policies and strategies of water resources development, management and conservation would help consider the water resources as one system and would avoid a water resources development approach focused only on surface water. This approach also facilitates the management of the resource itself, allowing a better understanding, by water users, of the hydrological issues involved.

The GIS techniques helps to assess the overall water resources within a river basin and the effect of various human interventions such as water conservation practices over large areas, large dams or small dams. At the resource level, groundwater pumping for irrigation used in conjunction with surface water provides benefits that increase the water supply.

This paper explores the reasons underpinning the apparent poor approach to full integration in the

management and use of both water sources, and the absence of more coordinated planning. In most climates around the world, precipitation, and consequently peak river discharge, occurs during a particular season of the year, whereas crop irrigation water requirements are at their greatest during periods of low rainfall when unregulated stream flows are significantly lower. For many irrigation systems, water supply is aligned with crop water requirements through the construction and management of dams which capture water during periods of high flow, enabling regulated releases to meet crop water requirements.

However, the construction, operation and distribution of water from dams are inherently costly undertakings. Furthermore, dams and the associated distribution systems are commonly subject to high system losses through evaporation and leakage, and they have social and ecological impacts upon communities and the environment in and on which they are built. Conversely, under natural recharge regimes, groundwater storage requires no infrastructure, the aquifer serving as the natural distribution system. The point of irrigation, in a groundwater-fed irrigation command, is mostly opportunistically located close to the groundwater extraction point, which in turn is integrated into on-farm irrigation infrastructure. Under a sustainable extraction regime, groundwater of a suitable quality can provide a reliable source of water either as a sole supply of water, or to supplement alternative sources.

These specific characteristics of surface and groundwater resources have important implications

for the optimal design and operation of irrigation systems.

At the general level the benefits attributed to optimizing conjunctive use of surface and groundwater have been investigated over many years through theoretical modelling and studies of physical systems. These benefits take the form of economic gains, increase in productivity, energy savings, and increased capacity to irrigate via larger areas, water resource efficiency and infrastructure optimization.

STUDY AREA

The Study area is Daulatpur distributaries of Tilloi block District Amethi (between latitudes 26 17_ and 26 24 and longitudes 81 23 and 81 29) .The length of canal is 17.85 km. and it is taking off from km 27.14(R) of Jaunpur branch. The discharge is 39.00 cusec; G.C.A. and C.C.A. are 3709.16 Hectare meter and 3328.82 Hectare meter respectively.

Present study area is part of Ghaghara Gomti - basin. This work developed integrated framework and demonstrated its application in canal network of Daulatpur distributaries system.


- The main problem of this area is water logging and salinity.
- The recharge of the aquifer due to seepage from the (canals of the) irrigation system is considered as the main cause of drainage problem.
- Ground water management has been accorded a low priority.
- The farmers of tail portion of canal are not getting required quantity of water as per demand of different crops.



Water logged Area of Daulatpur Distributaries

On the basis of Data collected from Irrigation Department, U.P., Swara and Ground Water

Department, U.P., graphs are plotted as mentioned below:

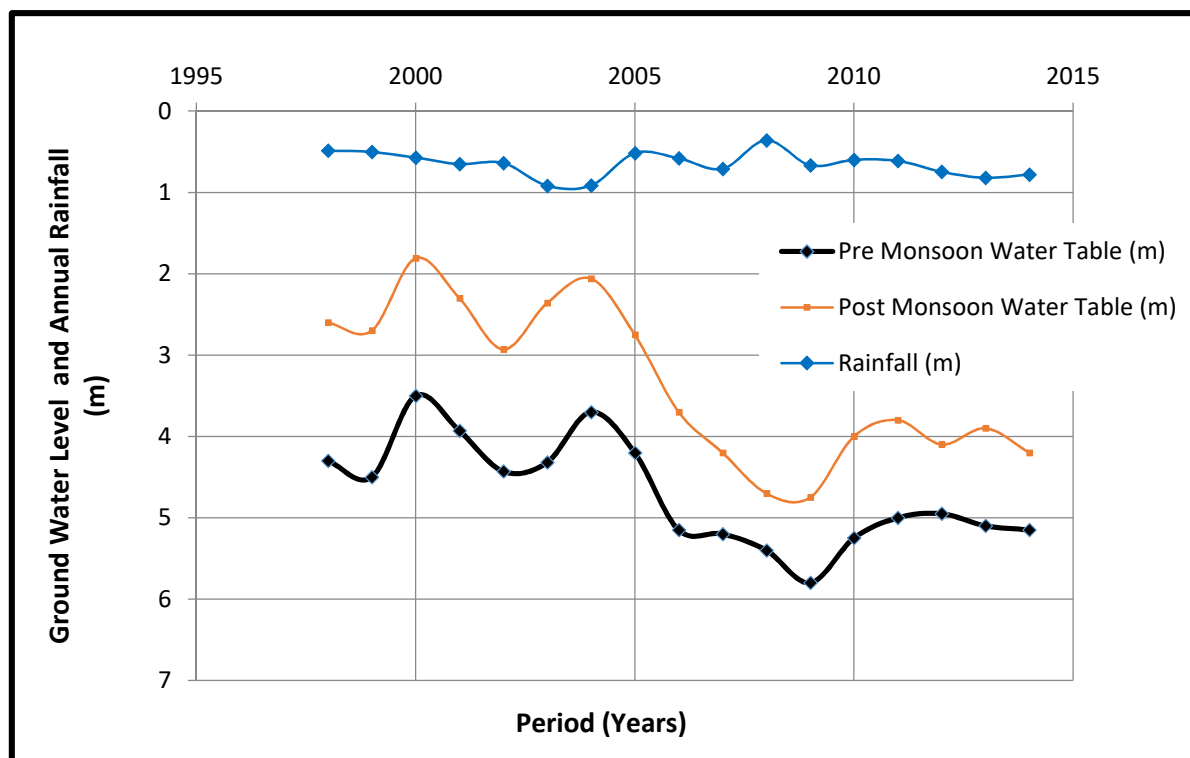

GRAPH BETWEEN GROUND WATER LEVEL AND TIME PERIOD (YEARS)

ANALYSIS OF GRAPH

Graphs are plotted on the basis of secondary data of Groundwater. Which is obtained from Swara office Lucknow. The graph drawn shows that as we moves from year 1998 to 2015 there is general increase in depth of Ground water (PRM). This indicate the increase in tendency of over exploitation of ground water which must be checked. Similarly in the case of (PTM) also there is tendency of increase in depth of ground water. This may be due to over extraction of ground water and as well as it may be due to less rainfall during that period.

GIS BASED MODELING

A GIS based generic decision support system is employed for management of water resources in canal commands of Ghagra Gomti Basin, The recharge obtained was used to simulate observed ground water levels by Visual MODFLOW. The model uses four levels of geo-spatial units: homogeneous unit (HU), sub-irrigation unit (SIU), micro sub-basin (MSB) and sub-basin (SB). The

Sub-basin is the largest spatial unit within the model. This may be the gross command area of a branch or a main canal. MSB is the gross command area of a canal, which may be either a distributaries or a branch canal. A sub-basin may consist of several MSBs. Micro sub basin (MSB) and HU are the largest and smallest calculation units, respectively, in the model. Sub-irrigation unit consists of one or more HUs. All HU in a SIU has the similar potential to be waterlogged, soil characteristics, access to irrigation and depth to groundwater levels. They differ from each other in land use or crop grown. As the command area of a MSB is usually a large area having different water management practice at the canal head, middle and tail, each MSB is further divided into different SIUs or Sub-Irrigation Units. SIUs can also be classified based on command and non-command area, distance from canals, susceptibility to be waterlogged and soil drainage. The classification is based mainly on land use. The irrigation demands are computed differently for ponded crops (i.e., rice) and non-ponded crops (all

other crops eg. wheat, sugarcane etc). For all crops other than rice, crop water demand is computed using the reference evapo transpiration for a reference crop (ETO) and crop factors as per FAO 56 guidelines (Allen et al., 1998)

Recharge from rainfall (As per Ground water resources estimation committee norms (G.E.C.)

$$R_r = 2.0 (P - 15)^{0.4}$$

$$R_r = 1.35 (P - 14)^{0.5}$$

Where, R_r = net recharge due to precipitation during the year, in inches;


P = annual precipitation, in inches

Recharge from Canal Seepage


$R_{cmax} = K (B + 2D)$ (in case of deeper water table)

$R_{cmin} = K (B - 2D)$ (in case of shallow water table)

Where B is width of canal, D is depth of flow and K is hydraulic conductivity of the bed material.

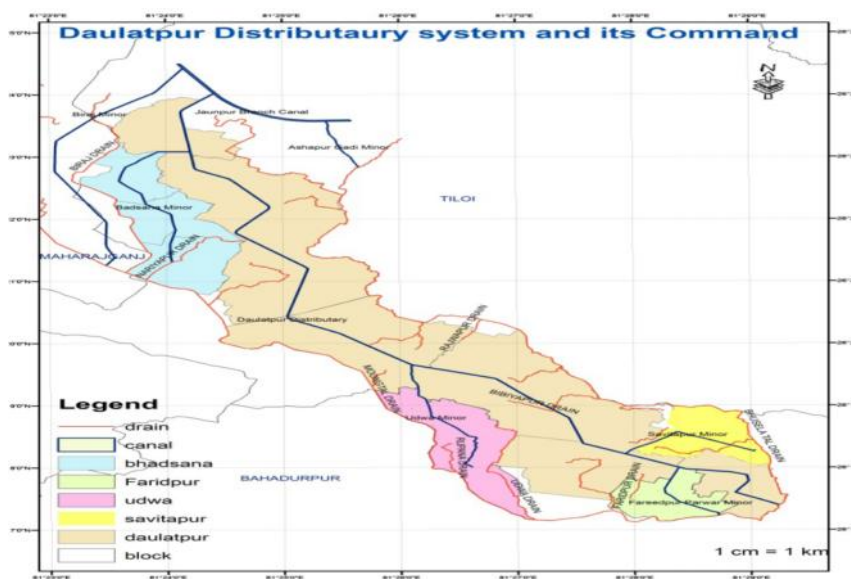

Daulatpur distributary System and its Command

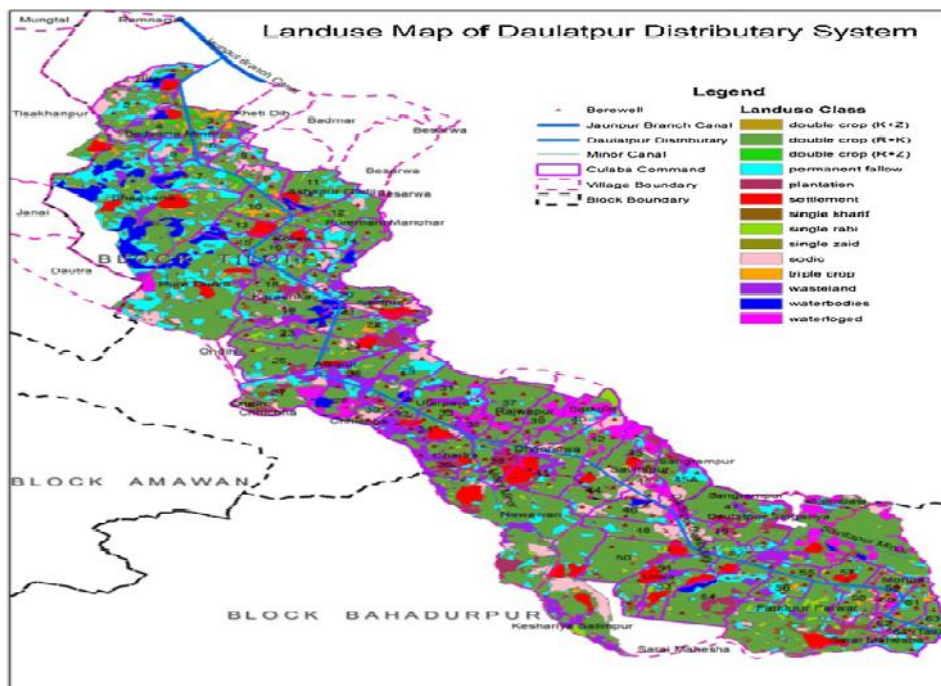

CONCLUSION

The work presented a framework for agricultural canal system simulation and management in Indo-Gangetic plains of Uttar Pradesh in India. Model results demonstrate potential applicability of the methodology in large canal systems. Following conclusions may be drawn from the study. The canal water use efficiency may increase with decrease in rainfall or canal water supply resulting in increased ground water use or depletion in ground water reservoir for the same cropping pattern and intensity. At the same time with the increase in rainfall or canal water supply, the canal water use efficiency may decrease but the ground water depletion is reduced. By opting conjunctive use of surface and groundwater in Daulatpur distributaries command, the water use efficiency of canal water may increase up to 58%. For the normal rainfall sequence of 847.3 mm per year and canal supply of 314.4 mm per year in Daulatpur distributary system, canal water use efficiency increases to 40.7% against 37.3%, while the depletion in ground water level increases to 19 cm per year in place of 18 cm per year in case of present cropping intensity of 130% (of command area). It clearly indicates that depletion in ground water levels is directly related to proposed cropping pattern/cropping intensity and it reduces with increase in rainfall or increase in canal water supply or with the proposal of less water requiring crops.

However this depletion in ground water level can be maintained more effectively at constant level with implementation of conjunctive use at Kulawa command level to bring more area under cultivation and saving energy cost in tail commands.

REFERENCES

- [1] Jehangir, W.A; Qureshi, A.; Ali, N. 2002 conjunctive water management in the Rechna Doab.
- [2] Allen, R.G., Pereira, L.S., Raes, D., Smith, M., 1998. FAO Irrigation and Drainage Paper No. 56 Crop evapotranspiration (guidelines for computing crop water requirements), FAO, Rome, Italy (ISBN 92-5-104219-5).
- [3] Bansal, A.K., Raut, A.K., Srivastava, P.K., 2012. Canal simulation model for conjunctive irrigation management. *Water Energy Int.* 69 (11), 45–51 (ISSN:0974-4207).
- [4] Basu, A.N., 1971. Fitting of a Markov chain model for daily rainfall data at Calcutta. *Indian J. Meteorol. Geophys.* 22, 67–74
- [5] Brouwer C., Hoevenaars, J.P., Bosch, B. E. Van and Hachco, N. 1992. *Canals. Irrigation Water management Training manual no.7.* FAO
- [6] Chowdhury, A., Jha, M.K., Chowdary, V.M., Mal, B.C., 2009. Integrated remote sensing and GIS-based approach for assessing groundwater potential in West Medinipur district, West Bengal, India. *IntJ. Remote Sens.* 30(1), 231–250, <http://dx.doi.org/10.1080/01431160802270131>
- [7] Handbook of Hydrology (1972). Soil Conservation Department, Ministry of Agriculture, New Delhi, India.
- [8] Heinemann, P.H. (2010). Decision support system for food and agriculture. System analysis and modeling in food and agriculture, Encyclopedia of life support system (EOLSS), UNESCO-EOLSS Joint Committee Secretariat, UNESCO, SC/PSB- 1 rue Miollis, 75732 Paris, France.
- [9] Kumbhar, V.G., Singh, T.P., 2013. A systematic study of application of spatial decision support system in agriculture. *Int. J. Sci. Eng. Res.* 4 (12), 68–71 (ISSN2229-5518)
- [10] Levidow, L., Zaccaria, D., Maia, R., Vivas, E., Todorovic, M., Scardigno, A., 2014. Improving water-efficient irrigation: prospects and difficulties of innovative practices. *Agric. Water Manage.* 146, 84–94
- [11] Reddy, M.N., Rao, N.H., 1995. 1995, GIS Based Decision Support Systems in Agriculture. National Academy of Agricultural Research Management Rajendranagar, 1–11
Santhi, C., Muttiah, R.S., Arnold, J.G., Srinivasan, R., 2005.
- [12] A GIS-based regional planning tool for irrigation demand assessment and savings using SWAT. *Trans. ASAE* 48 (1), 137–147 (American Society of Agricultural Engineers ISSN0001-2351).
- [13] Simons, M., Podger, G., Cooke, R., 1996. IQQM—a hydrologic modeling tool for water resource and salinity management'. *Environmental Software*, vol. 11, nos. 1-3, 185–192
Stafford, D.B. (Ed.), 1991. ASCE, New York
SMEC (2010).
- [14] Final Report for JBS and HBS – Preparation of Ghaghra Gomti Basin Plans & Development of Decision Support System. SMEC International Pty Ltd.
- [15] Subramanian, K., 2013. *Engineering Hydrology*. McGraw Hill Education (India) Private Limited, New Delhi.
- [16] Waterloo hydrologic, 2002. *Visual MODFLOW v.3.0.0 User's Manual*, Ontario, Canada. Water Technology Centre, 1998. Development of guidelines for sustainable water management in irrigation projects. In: *Contributions to Water Science and Technology*. IARI, New Delhi.